



# 115W LED Retrofit Lamp w/ Type V Distribution

Order Code: LP38561

Model# HR-115T5A-E39AK



### Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

### Features & Benefits

- Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Horizontal burn position
- Easy installation
- Reduced maintenance costs

*\*Note: It is the customer's responsibility to verify that the lamp compartment meets the minimum required lamp compartment dimension of 8" diameter by 11" long.*

### Applications

- Area Lighting
- Flood lighting

### Notes

- The use of an external surge protection device is recommended. Operating temperature range between -4°F and 113°F (-20°C and 45°C). Suitable for use in dry and damp environments.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamp base rotates up to 270° to allow for proper aiming of the lamp.

### Product Performance

Input Power (W)	115
Bare Lamp Lumens	13500
Lumens/Watt (Bare Lamp)	117
Orientation	Horizontal
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	70
Life Hours	50000
Dimming	No
Operating Temperature Range	-4°F to 113°F (-20°C to 45°C)
Distribution	Type V

### Physical Characteristics

Base Type	Mogul, (E39)
Overall Length A	11.69" (297mm)
Diameter B	5.43" (138mm)
Weight	2.8 lbs (1280g)

### Electrical Characteristics

Input Voltage Range	120V-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%

### Regulatory Qualifications



- cULus Listed
- cULus Classified (per UL 1598C)
- Model# HR-115T5A-E39AK

### Accessories


- BSP3-277-LC Surge Protector



# Venture 115W LED Retrofit Lamp w/ Type V Distribution

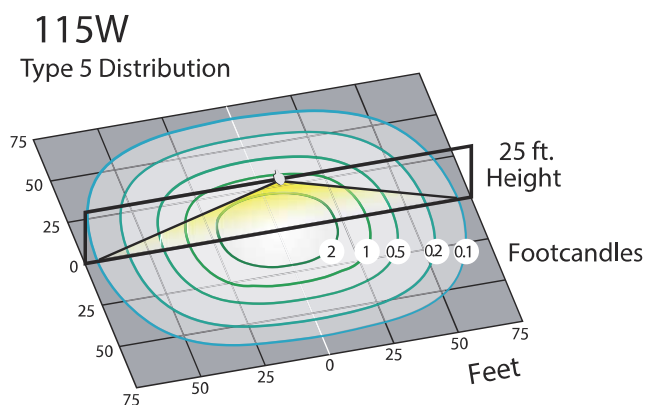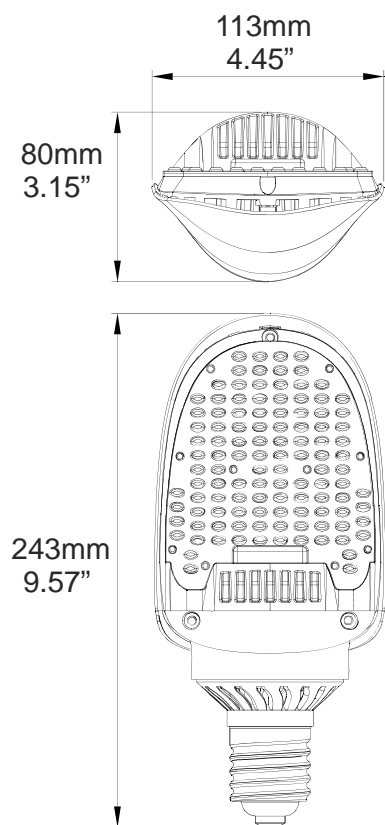

Note: data shown is for the bare lamp only

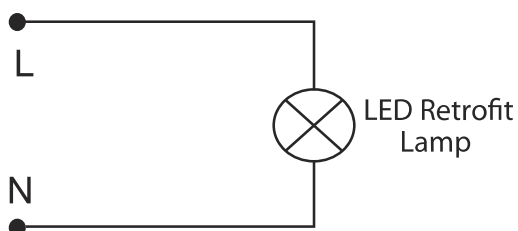

Easy to install - bypass ballast and provide voltage directly to lamp

(800) 451-2606  
Fax: (800) 451-2605  
2451 Enterprise Parkway East  
Twinsburg, Ohio 44087 USA  
E-mail: [venture@adlt.com](mailto:venture@adlt.com)  
[VentureLighting.com](http://VentureLighting.com)

