

LED Flood Light

FLL24-120 and FLL24W-120
120VAC 50/60Hz operation

| | |
|--------------|--|
| Project: | |
| Catalog#: | |
| Approved by: | |
| Date: | |

Features

- Energy Saving
- Comparable to 250W halogen while using less energy
- 50,000 hour LED lifespan for maintenance-free operation
- Heat dissipating fins optimizes thermal management

Housing

- Low-copper, aluminum die-cast housing and lens frame
- Heat dissipating fins for optimized thermal management.
- Durable polyester powder coat finish
- Bronze or white housing

Lens/Refractor

- Tempered glass lens, thermal shock and impact resistant.

LEDs/LED Driver

- 24W
- Color temp: Neutral White (4100K)
- CRI: 80
- 2,300 Lumen Output
- 50,000 Hour Life
- Input voltage: 120VAC 50/60 Hz
- Knurled notches securely retain rotated position even in demanding environments.

Mounting

- 1/2" NPS aluminum die-cast swivel arm fits to standard junction box (not included).
- Side screw on arm knuckles allows for optics aiming.

Certifications

- UL/CUL Listed, suitable for Wet Locations

Warranty


- 2-Year Warranty

Applications


Ideal for building facades, security, accenting architecture, signs and displays.



Photometrics

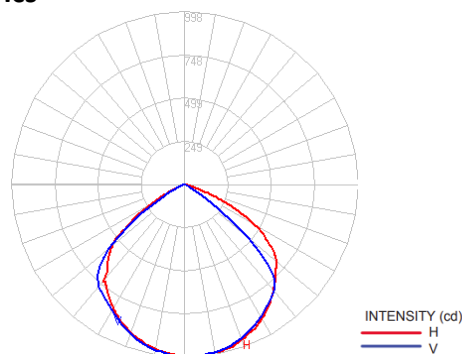

Dimensions

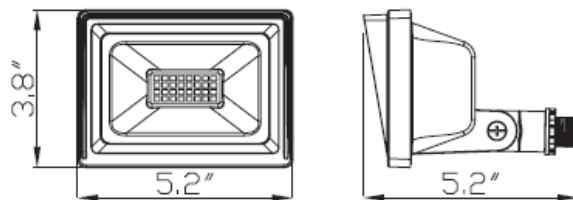

| Ordering Information | | | | | | |
|----------------------|-------------------|---------------|----------|--------|--------------------|---------------|
| UPC Code | Model # | Input Wattage | Lumens | Driver | Voltage | Housing Color |
| 09500 | FLL24-120 | 24 Watt | 2,300 lm | LED | 120VAC 50/60 Hz | Bronze |
| 09501 | FLL24W-120 | | | | | White |

Sample Ordering Information

FLL24-120
24W, 2,300 Lumens
4100K
120VAC
Bronze Housing

