


4400 NW 19th Avenue, Unit K Pompano Beach, FL 33064 Phone: (305) 895-9525 · Fax (305) 895-7879 www.terracastproducts.com

Photometrics A= Height ~ 150 HPS Lamp ~ 16000 Lumens B= Width ~12 Feet Mounting Height ~ Clear Lens

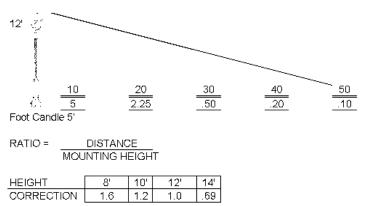

QUICK REFRENCE SPACING GUIDE Height Minimum F.C. Spacing AVERAGE FOOTCANDLES

Construction:

Cast Aluminum with Brass and Stainless Steel Screws, for RUST FREE LIFE. The Fitter is 3 inches in diameter. The fixture finish is a thermoplastic modified Nitocelloucs coating. All electrical components are UL recognized. This fixture has a UL label and is suitable for wet locations. Sockets are medium and mogul for HID use and have nickel plated screw shell with center contacts 1500W pulse rated. All ballast are UL approved factory wired and pre-tested.

All 53 colors, Powder Coating Available Contact Factory.

Seedy, Optic, Acid Etched, Optic Acid Etched

<u>Ballast/Lamps:</u> CF13-26; HPS35-250; MH50-250; LED35W

Voltage:

120; 208; 240; 277

Options:

Refractor Type III or IV, Black-out Panel

HPS	LAMP	35	50	70	100	150	250
	CORRECTION	.14	.25	.36	.59	1.00	1.72

МН	LAMP	50	70	100	175	250
	CORRECTION	.18	.31	.53	.88	1.28

	LAMP	13	26
COM FL	CORRECTION	.05	.10

	LAMP	30	57
LED	CORRECTION	1.10	1.20