

# 28W 5K Flat Top Bollard Order Code: BL26137



#### Description

Venture Lighting's LED Bollard makes it an ideal choice for size commercial, architectural, retail and residential applications. Fixtures can be used in wet locations. They are designed to provide low-level pedestrian lighting to draw attention to entryways and to act as guides along walkways for such applications as parking areas, building entrances, and university campus lighting.

#### Construction

The fixture is bronze powder coated for superior corrosion resistance. These versatile, outdoor fixtures have clear PC lens, fully gasketed housings and a highly reflective cone shaped reflector. The base is cast aluminum and the housing is a seamless extruded aluminum.

#### Electrical

Fixtures are provided with 120-277V 50/60 Hz drivers with 0-10V DC dimming as a standard. 10kA surge protection is a standard.

#### Mounting

Each fixture is supplied with mounting kit which includes anchor bolt template, anchor bolts and necessary stainless steel fasteners to make installation quick and easy.

## Model# BL2-30CA

Product Performance	
Wattage	28W
Lumen Output	3180
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	70+
Life Hours	50,000
Replaces HID Wattage	175W
Beam Angle (°)	Cone/140°
Operating Temperature Range	-40°F to 104°F (-40°C to 40°C)
Physical Characteristics	
Bollard Top	Flat
Diameter B	7.09"
Fixture Color	Bronze
Height	41.5"
Electrical Characteristics	
Amperage Draw (Input Volts/Amps)	120/0.25 208/0.15 240/0.13 277/0.11
Regulatory Qualifications	
cULus Listed	

Suitable for wet locations; IP65


Model: BL2-30CA

### Accessories

AC17738 - Backlight Shield




# Venture 28W 5K Flat Top Bollard





Mounting kit, included contains anchor bolts and mounting template

B-U-G rating is (B1-U3-G1)

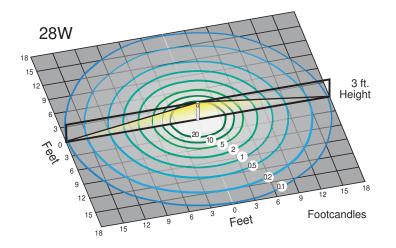

(800) 451-2606 Fax: (800) 451-2605 2451 Enterprise Parkway East Twinsburg, Ohio 44087 USA E-mail: venture@adlt.com VentureLighting.com

