



# Utopia™ PRO LED A19

## Enclosed Rated LED A19 Lamps

With the Utopia™ PRO LED A19 lamp, Ushio America delivers a true omni-directional LED replacement for the popular 60W A19 incandescent lamps.

Designed with a 240° beam angle, the Utopia PRO delivers uniform light distribution over a wide area. For use in fully enclosed fixtures, these lamps replicate the fit, form, and function of traditional incandescent A19 lamps and last up to 25 times longer. With a rated life of 25,000 hours and an energy savings of 85% compared to 60W incandescent lamps, the Utopia PRO LED A19 is ideal for most applications. Available in 9W, these dimmable lamps have an E26 medium base suitable for use in ceiling fixtures, recessed fixtures, sconces, pendants, and other decorative fixtures.

Ushio America is proud to stand behind these ENERGY STAR® certified LED lamps with a 3-year limited warranty. These LED A19 lamps operate on 120V with Soft White (2700K) and Daylight (5000K) color temperatures.






## FEATURES & BENEFITS

- Direct Replacement for 60W Incandescent A19 Lamps
- Enclosed Rated for Fully Enclosed Luminaires
- Suitable for Use in Recessed Fixtures
- Smooth, Uniform Dimming
- 85% Energy Saving
- Omni-Directional Lighting
- 25,000 Hours Rated Life
- Suitable for Use in Damp Locations
- Application Friendly: UV Free and IR Free
- Environmentally Friendly: Mercury Free, Lead Free and RoHS Compliant
- 3-Year Limited Warranty

## APPLICATIONS

- Hotel and Restaurant Lighting
- Residential Lighting
- Retail Lighting
- Accent Lighting
- Office Lighting

# SPECIFICATIONS

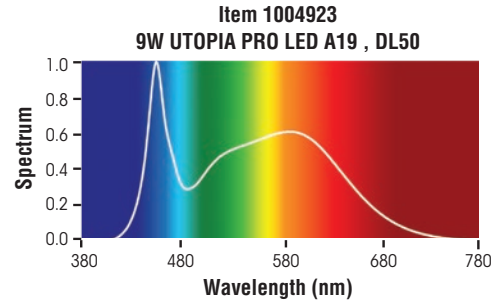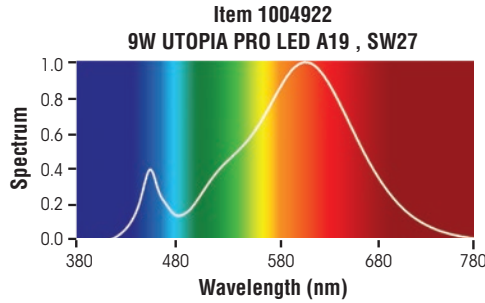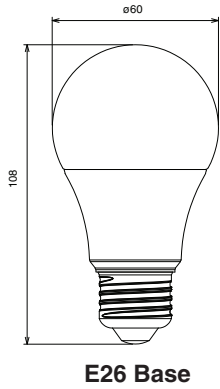

Case Quantity: 50

Watts (W)	Ordering Code	Lamp Description	Volts (V)	Color Temp (K)	Lumens* (lm)	CRI	Rated** Life (h)
9	1004922	★ 9W UTOPIA PRO LED A19, SW27	120	2700	800	80+	25,000
9	1004923	★ 9W UTOPIA PRO LED A19, DL50	120	5000	800	80+	25,000
9	1004514	● 9W UTOPIA PRO LED A19, SW27	120	2700	800	80+	25,000
9	1004515	★ 9W UTOPIA PRO LED A19, DL50	120	5000	800	80+	25,000

\* Photometric data is based on LM-79 tests.

\*\* Rated average life based on 70% lumen maintenance.

Not compliant with California Title 20.

★ ENERGY STAR® Certified

● Sold Out - For Reference Only

**Item# 1004515**  
**9W UTOPIA PRO LED A19, DL50**

**Lighting Facts/**  
**Faits d'éclairage**

Per Bulb/Par l'ampoule

**Brightness/Luminosité** 800 lumens

**Estimated Yearly Energy Cost/** **\$1.08**  
**Coût énergétique annuel estimé**

Based on 3 hrs/day, 11¢/kWh. Cost depends on rates and use. /Basé sur 3 heures/jour, 11¢/kWh. Les coûts dépendent du tarif et de la fréquence d'utilisation.

**Life/Vie** 22.8 years/ans  
Based on 3 hrs/day. /Basé sur 3 heures/jour.

**Light Appearance/Apparence de l'éclairage**

Warm/Chaud Cool/Froid

5000K

**Energy Used/Énergie utilisée** 9 watts

**Item# 1004922**  
**9W UTOPIA PRO LED A19, SW27**

**Lighting Facts/**  
**Faits d'éclairage**

Per Bulb/Par l'ampoule

**Brightness/Luminosité** 800 lumens

**Estimated Yearly Energy Cost/** **\$1.08**  
**Coût énergétique annuel estimé**

Based on 3 hrs/day, 11¢/kWh. Cost depends on rates and use. /Basé sur 3 heures/jour, 11¢/kWh. Les coûts dépendent du tarif et de la fréquence d'utilisation.

**Life/Vie** 22.8 years/ans  
Based on 3 hrs/day. /Basé sur 3 heures/jour.

**Light Appearance/Apparence de l'éclairage**

Warm/Chaud Cool/Froid

2700K

**Energy Used/Énergie utilisée** 9 watts

**Item# 1004923**  
**9W UTOPIA PRO LED A19, DL50**

**Lighting Facts/**  
**Faits d'éclairage**

Per Bulb/Par l'ampoule

**Brightness/Luminosité** 800 lumens

**Estimated Yearly Energy Cost/** **\$1.08**  
**Coût énergétique annuel estimé**

Based on 3 hrs/day, 11¢/kWh. Cost depends on rates and use. /Basé sur 3 heures/jour, 11¢/kWh. Les coûts dépendent du tarif et de la fréquence d'utilisation.

**Life/Vie** 22.8 years/ans  
Based on 3 hrs/day. /Basé sur 3 heures/jour.

**Light Appearance/Apparence de l'éclairage**

Warm/Chaud Cool/Froid

5000K

**Energy Used/Énergie utilisée** 9 watts

## CAUTION:

This lamp may not be compatible with all dimmers. Check [www.ushio.com](http://www.ushio.com) to find up to date dimmer compatibility options. Use only 120V 60Hz circuits. Do not open. No user serviceable parts inside. Suitable for damp locations. Use is not recommended where exposed to weather. Outdoor usage requires an enclosed fixture. Suitable for use in recessed fixtures. Suitable for use in totally enclosed luminaires. The device is not intended for use with emergency exit fixtures, emergency exit lights, photo controls, or electric timers. Reliable operating environment temperature is -4°F to 113°F. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.