



# 54W Recessed LED Canopy Light

Order Code: CP48715



## Description

The Venture Lighting LED Recessed Canopy series of luminaires are low profile, lightweight, and designed for long life and low maintenance. The fixtures are designed to allow for easy replacement of existing recessed lighting fixtures. The robust design paired with universal mounting makes them ideal for locations, such as retail canopies and drive-thrus, where heavy pedestrian or automotive traffic makes maintenance difficult.

## Construction

The housing unit is constructed from heavy-duty aluminum. Fixtures are finished with a durable white polyester powder coating. To ensure weather-tight protection, each optical assembly is sealed with a silicone gasket. Each unit is ETL certified to withstand wet locations. Luminaires are rated for an ambient operating temperature range of -40°C to 40°C.

## Optics

High-performance, UV stabilized acrylic optics are used to achieve precise photometric distributions.

## Electrical

The Class II power supply has a range of 120-277V, 50/60 Hz. The high performance LEDs are rated up to 190,000 hours at 25°C ambient temperature. 0-10V dimming capability is standard.

## Mounting

The fixture is NON-IC Rated and is designed for recessed mounting. IT IS THE CUSTOMER'S RESPONSIBILITY TO VERIFY THE AVAILABILITY OF ADEQUATE SPACE FOR INSTALLATION.

## NOTE:

\*Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11

DLC Model# CPA-054C-ND

## Product Performance

Operating Temperature Range	-40°F to 104°F (-40°C to 40°C)
Wattage	54W
Lumen Output	6161
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	70+
Lumen Maintenance @50,000 hours*	98%
Calculated L70 @ 25°C Ambient in Hours*	>500,000
Replaces HID Wattage	175W

## Physical Characteristics

Fixture Color	White
Width	16.0"
Length	16.0"
Height	2.4"
Weight	6.8 lbs

## Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/0.46 208/0.27 240/0.24 277/0.22
Surge Protection	10kA

## Regulatory Qualifications


cETLus Listed

DLC Qualified - Model# CPA-054C-ND


Rated for wet locations



# Venture 54W Recessed LED Canopy Light

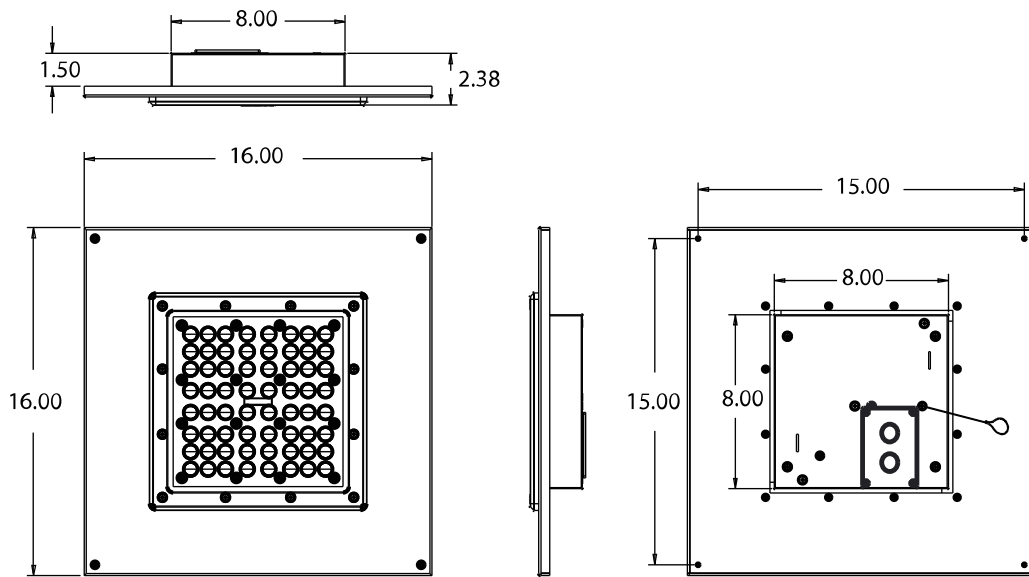

Luminous Intensity Distribution Diagram

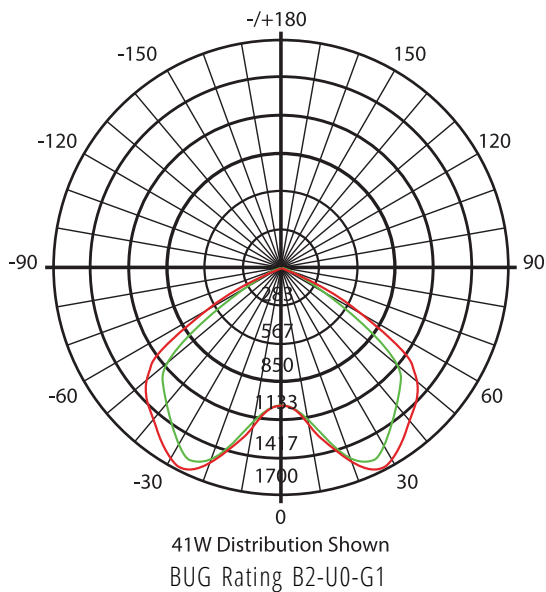

(800) 451-2606  
Fax: (800) 451-2605  
2451 Enterprise Parkway East  
Twinsburg, Ohio 44087 USA  
E-mail: [venture@adlt.com](mailto:venture@adlt.com)  
[VentureLighting.com](http://VentureLighting.com)

