



Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Features & Benefits

- Energy Saving Replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs

Applications

- Post top
- Wall pack
- Area Lighting
- Flood lighting
- Garage lighting
- General illumination

Notes

- The use of an external surge protection device is recommended.
- Operating temp. range between -40°F and 113°F (-40°C and 45°C).
- Suitable for use in open and enclosed luminaires.
- Suitable for use in dry and damp environments.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamps have clear polycarbonate cover lenses

Warranty

For warranty information refer to:

<https://www.venturelighting.com/resources/warranties>



Product Performance

Input Power (W)	27
Initial Lumens	3900
Lumens/Watt	142
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	80
Life Hours	50000
Minimum Lamp Compartment Size	13.39" x 7.87" x 7.87" (340mm x 200mm x 200mm)
Dimming	No
Operating Temperature Range	-40°F to 113°F (-40°C to 45°C)

Physical Characteristics

Base Type	Medium, (E26)
Overall Length A	6.69" (170mm)
Diameter B	2.36" (60mm)
Weight	0.62 lbs (0.28 kg)

Electrical Characteristics

Input Voltage Range	100V-277V; 50/60Hz
Power Factor	≥90%
THD	≤20%

Regulatory Qualifications


cULus Listed (UL 1993/CSA 22.2 No. 1993)

cULus Classified (UL 1598C/CSA C22.2 No. 250.1)

Accessories

SP12714 120-277V Surge Protector

Venture 27W LED Retrofit Lamp

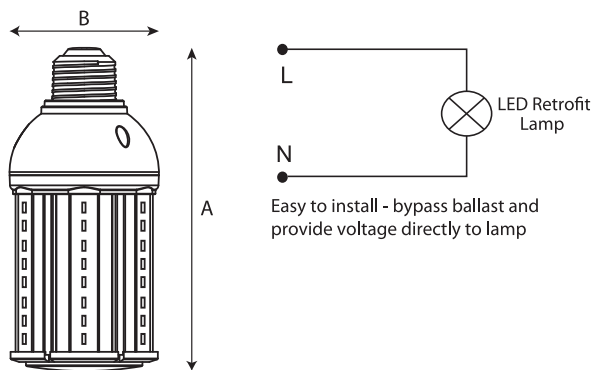

(800) 451-2606
Fax: (800) 451-2605
7905 Cochran Rd, Suite 300
Glenwillow, Ohio 44139
E-mail: Venture_Lighting@VentureLighting.com
VentureLighting.com

