



Ubiquity™ LED T8 CCT3 Universal (13W)

LED T8 CCT3 Universal Lamps

Ubiquity™ LED T8 CCT3 Universal lamps offer an instant energy-saving solution for F32T8 fluorescent lamps. These Ushio LED T8 lamps have a hybrid design capable of ballast compatible or direct-wire operation. These lamps utilize the existing electronic ballast, saving labor and maintenance costs. If the ballast is not compatible or has reached the end of its useful life, simply bypass the ballast. It's easy and energy efficient!

Ubiquity LED T8 CCT3 Universal lamps are available in 13W and can switch from 3500K/4000K/5000K color temperatures on the end cap. Ushio America is proud to stand behind these 50,000 hour rated life LED lamps with a 5-year limited warranty. Use these dual purpose lamps to reduce the number of SKUs in your inventory today.

APPLICATIONS

- Fluorescent Troffers
- Office Lighting
- Warehouse Facilities
- Fluorescent Low Bay & High Bay
- Retail Lighting
- Healthcare Facilities
- School Lighting
- Industrial Shop Lighting




FEATURES & BENEFITS

- Both Ballast Compatible Mode and Bypass Mode, Two Functions in One Lamp
- Adjustable Color Temp Switch on Lamp Which Changes From 3500K/4000K/5000K
- For Bypass Mode, can Work in Both Single-Ended and Double-Ended, Shunted and Non-Shunted Socket
- Can be Used With Step Down Transformer for 480V to 120V & 277V
- Can Protect the Lamp From Being Impacted by Some Ballasts
- Beam Angle - 220° for Glass Powder Coated, 160° for Glass With PET
- UL & UL Classified, DLC 5.1, 5-Year Limited Warranty - 50,000 Hours Rated Life Reduce Maintenance



SPECIFICATIONS

Beam Angle = 220°
Visible Light Area = 320°

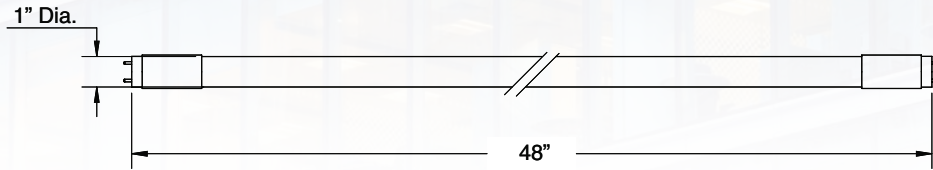

G13 Base

Sold in Case Quantity Only (25/Case)

| Watts (W) | Ordering Code | Lamp Description | Compatible Lamp Power (W) | Color Temp (K) | Lumens (lm) | CRI | Rated Life (h) | Operation Mode |
|-----------|---------------|--------------------------------|---------------------------|----------------|----------------|-----|----------------|---------------------|
| 13 | 3000731 | UBIQUITY LED T8 UNIV CCT3, 48" | 12 | 3500/4000/5000 | 2150/2200/2200 | 83 | 50,000 | Compatible & Bypass |

⚠ CALIFORNIA PROPOSITION 65 WARNING: These products can expose you to chemicals including Phthalates, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

CAUTION:

These lamps are direct replacements for 32W/48T8, 30W/48T8, 25W/48T8 lamps only. Do not use with standard dimmers, see instructions. Operate on most instant-start and program-start electronic ballasts only. These lamps are not compatible with all ballasts. Before replacing existing fluorescent lamps, check compatibility of LED lamps and luminaire ballast. Please refer to www.ushio.com for a complete list of compatible ballasts. In ballast bypass mode this lamp runs on 120-277 line voltage. Risk of fire: Do not install this lamp in a Preheat Luminaire. Risk of electric shock: Use only in dry and damp locations. Not intended for use with emergency exits or for emergency lighting. Any modifications to the product will void the warranty. Lamps must be operated with an ambient fixture temperature of -30°C/-22°F to 56°C/133°F to ensure UL compliance. Lamp operating temperature -20°C/-4°F to 45°C/113°F maximum. Risk of fire: If the lamp or luminaire exhibits undesirable operation (buzzing, flickering, etc.) immediately turn off power, remove lamp from luminaire and contact manufacturer.

USHIO